




ULTIMATE

COLLECTION

MILKYWAY

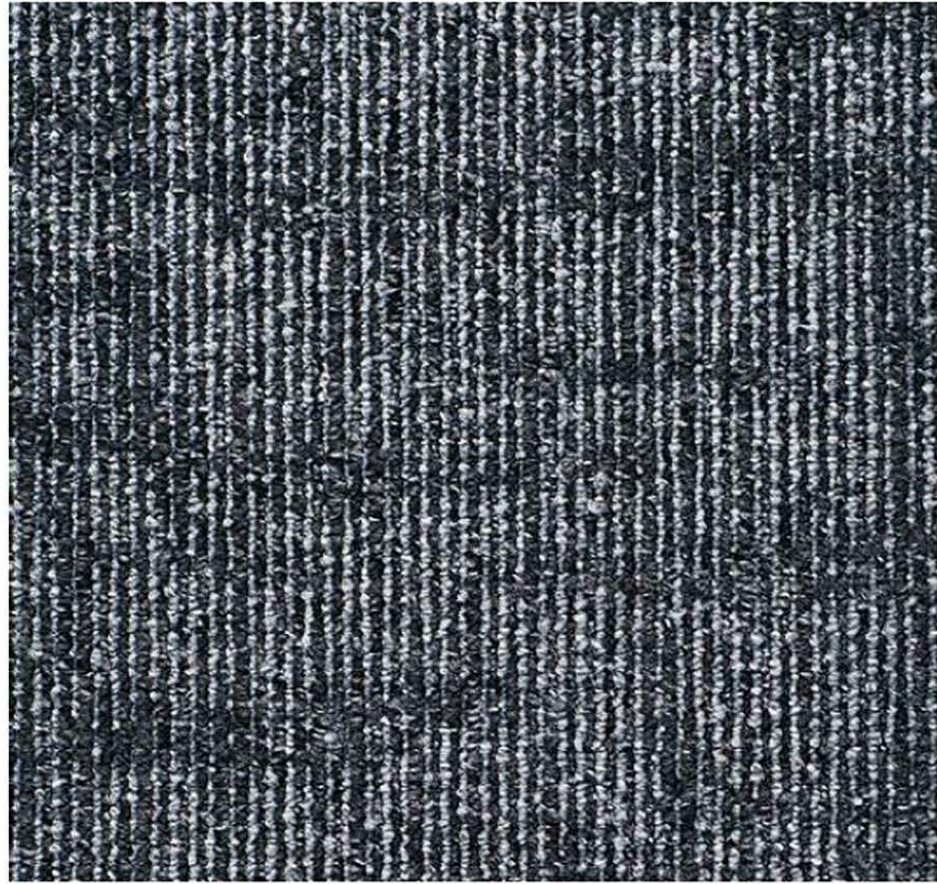


01 GREY



01 GREY



RAIN

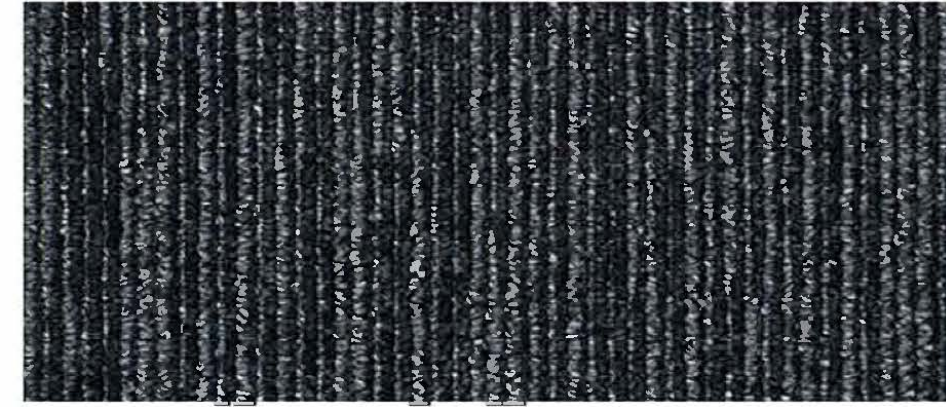

02 ANTHRACITE



03 LIGHT GREY




05 NAVY BLUE



03 LIGHT GREY




NATURAL

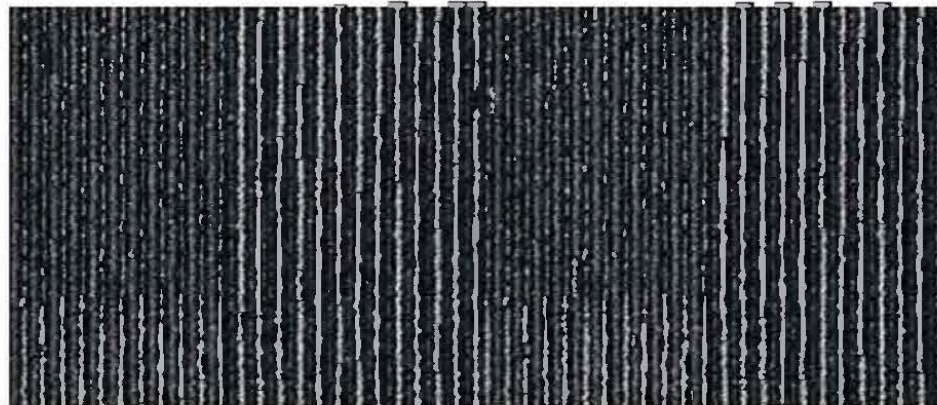

02 ANTHRACITE




06 CAFECREME

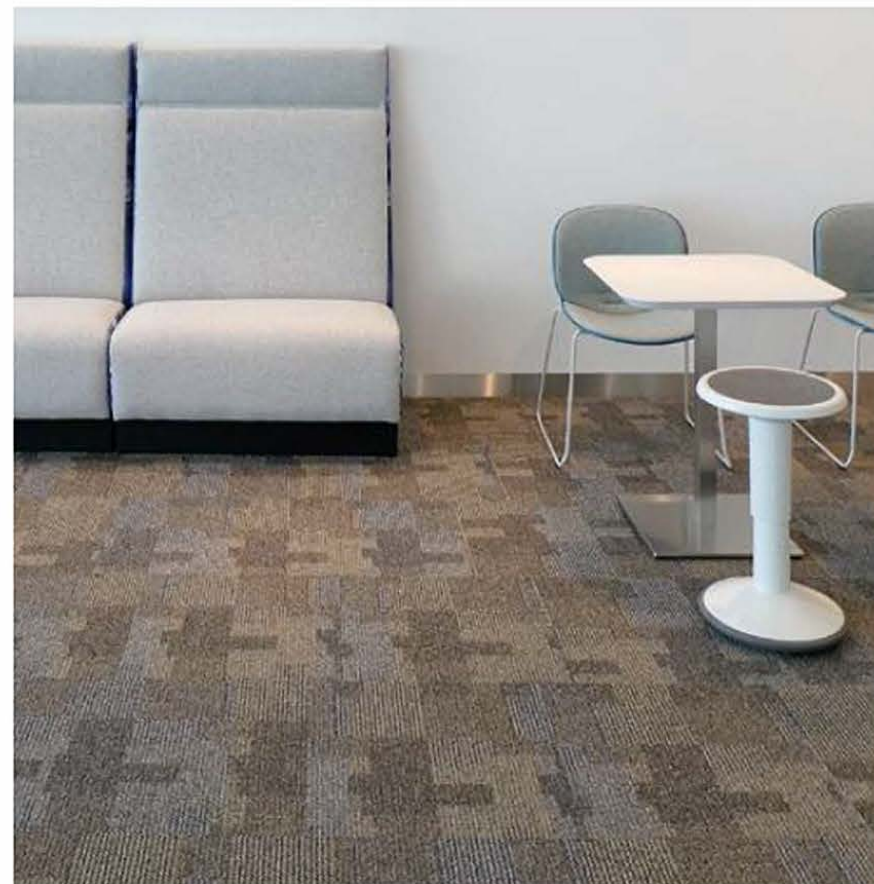


06 CAFECREME




FOGGY

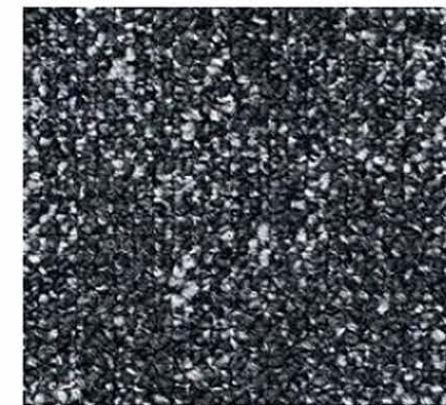


01 GREY

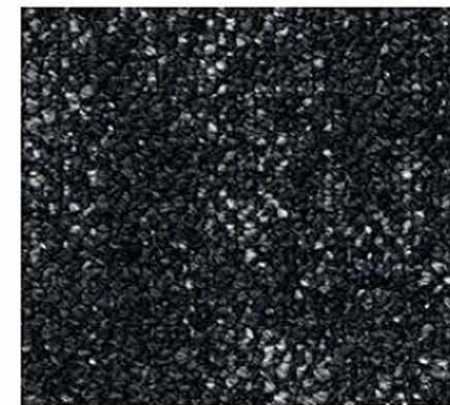

02 ANTHRACITE

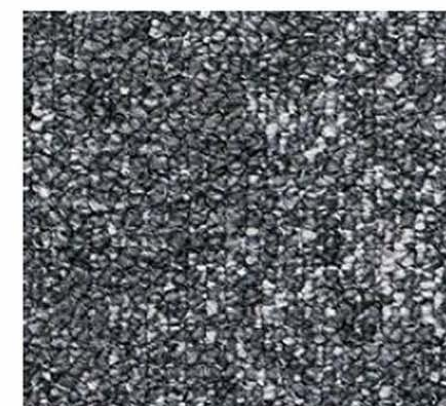

03 LIGHT GREY

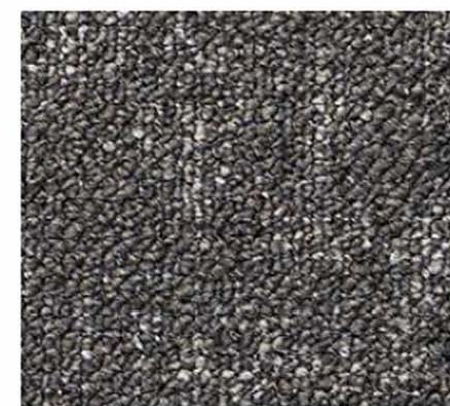

04 CAPPUCCINO




01 GREY




TWILIGHT




01 GREY

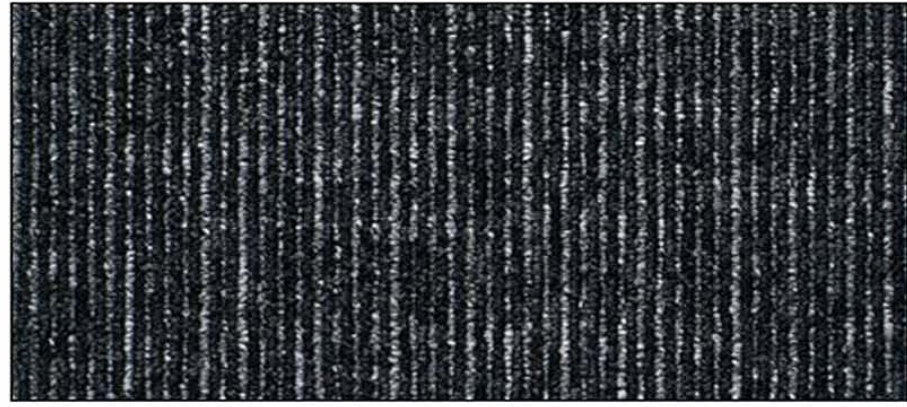

02 ANTHRACITE

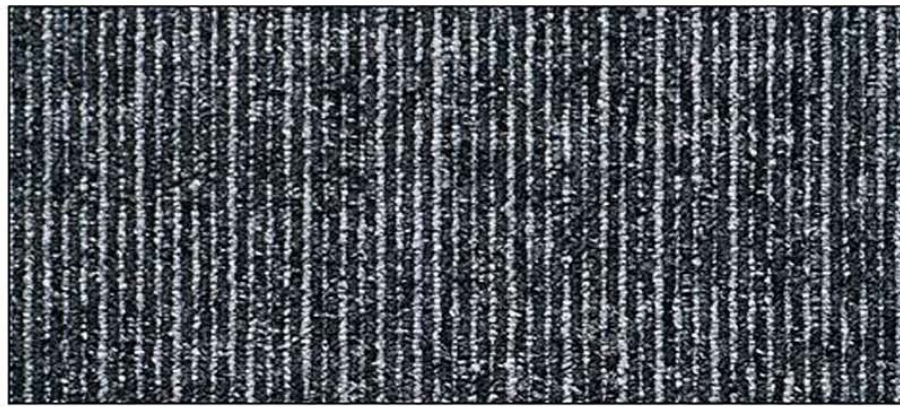

03 LIGHT GREY

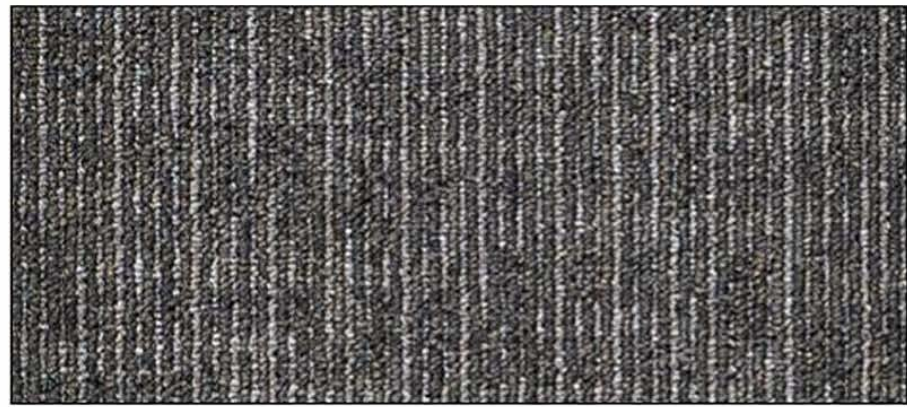


04 CAPPUCCINO




03 LIGHT GREY




SMOKEY

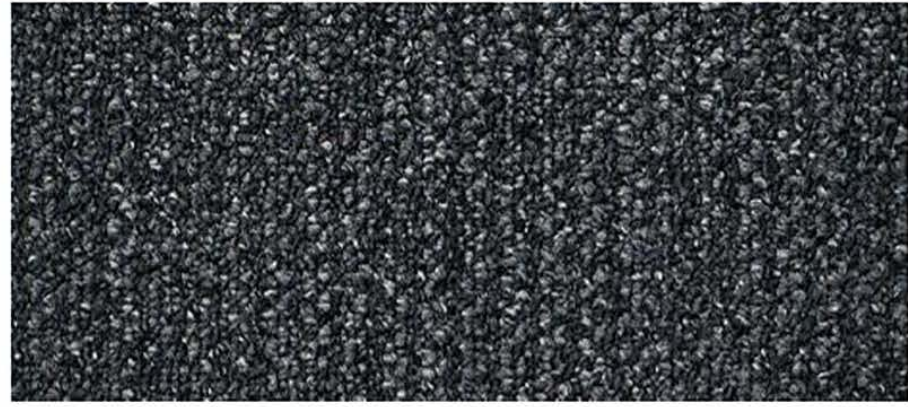

01 GREY

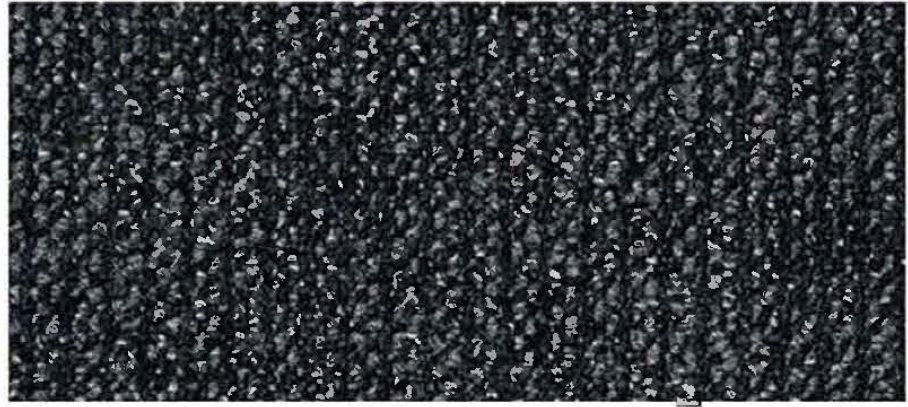

02 ANTHRACITE

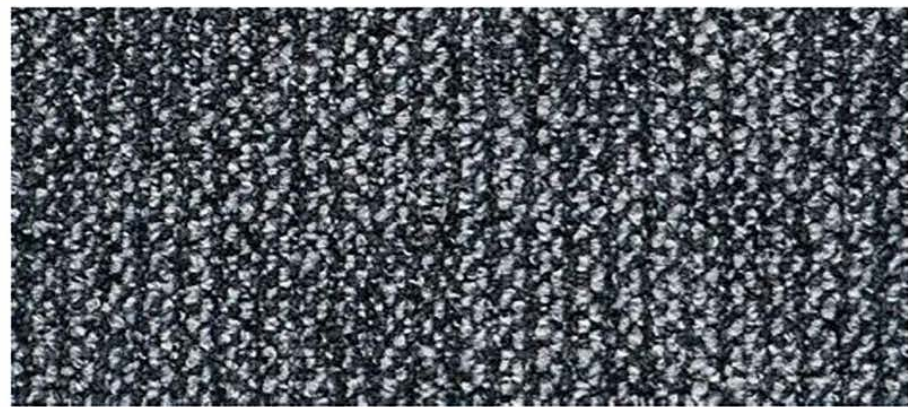

03 LIGHT GREY









04 CAPPUCCINO




01 GREY



specifications - teknik veriler

						
style name	rainbow	natural	rain	foggy	twilight	smoky
tuft gauge	1/10 loop pile	1/10 loop pile	1/10 loop pile	1/10 loop pile	1/10 loop pile	1/10 loop pile
pile composition	100% PA SDN	100% PA SDN	100% PA SDN	100% PA SDN	100% PA SDN	100% PA SDN
primary backing	Non Woven	Non Woven	Non Woven	Non Woven	Non Woven	Non Woven
secondary backing	Bitumen	Bitumen	Bitumen	Bitumen	Bitumen	Bitumen
pile height	3,00 mm	3,00 mm	4,00 mm	3,60 mm	3,00 mm	3,00 mm
pile density	0,152 gr/cm ²	0,152 gr/cm ²	0,137 gr/cm ²	0,128 gr/cm ²	0,131 gr/cm ²	0,111 gr/cm ²
pile weight	740 gr/m ²	660 gr/m ²	785 gr/m ²	770 gr/m ²	720 gr/m ²	630 gr/m ²
total weight	4600 gr/m ² ± 16%	4365 gr/m ² ± 16%	4640 gr/m ² ± 16%	4525 gr/m ² ± 16%	4480 gr/m ² ± 16%	4360 gr/m ² ± 16%
total height	8,00 mm	6,00 mm	7,00 mm	6,60 mm	8,00 mm	8,00 mm
number of knots	240881/m ² -7,5% ,+10%	237000/m ² -7,5% ,+10%	258000/m ² -7,5% ,+10%	240370/m ² -7,5% ,+10%	240881/m ² -7,5% ,+10%	200871/m ² -7,5% ,+10%
use class	Extreme / Heavy (33)	Extreme / Heavy (33)	Extreme / Heavy (33)	Extreme / Heavy (33)	Extreme / Heavy (33)	Extreme / Heavy (33)
castor chair test	A (EN 985)	A (EN 985)	A (EN 985)	A (EN 985)	A (EN 985)	A (EN 985)
dimensional stability	Pass (EN 985)	Pass (EN 985)	Pass (EN 985)	Pass (EN 985)	Pass (EN 985)	Pass (EN 985)
sound absorption	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)
thermal resistance	ca 0,08 m ² K/W	ca 0,08 m ² K/W	ca 0,08 m ² K/W	ca 0,08 m ² K/W	ca 0,08 m ² K/W	ca 0,08 m ² K/W
light fastness	≥ 5	≥ 5	≥ 5	≥ 5	≥ 5	≥ 5
static loading	Anti-Static	Anti-Static	Anti-Static	Anti-Static	Anti-Static	Anti-Static
wearability	≥ 4	≥ 4	≥ 4	≥ 4	≥ 4	≥ 4
water resistance	≥ 4	≥ 4	≥ 4	≥ 4	≥ 4	≥ 4
fire class conform	BSI-S1 1668-CFR-3134	BSI-S1 1668-CFR-3134	BSI-S1 1668-CFR-3134	BSI-S1 1668-CFR-3134	BSI-S1 1668-CFR-3134	BSI-S1 1668-CFR-3134
tile size	60 x 60 cm ± 1%	60 x 60 cm ± 1%	60 x 60 cm ± 1%	25 x 100 cm ± 1%	60 x 60 cm ± 1%	60 x 60 cm ± 1%

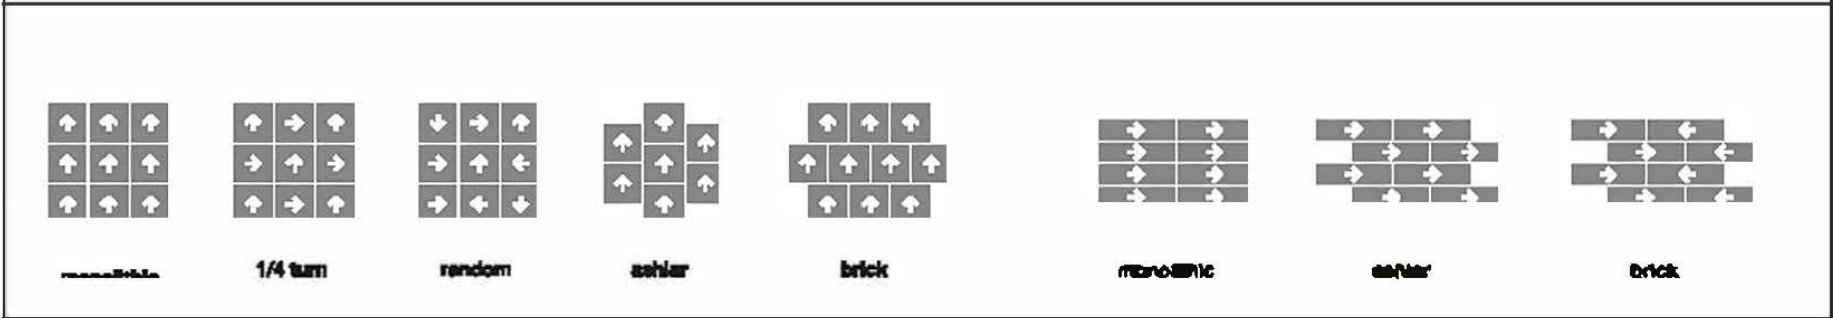






bugün iste yarın al
order today receive tomorrow!

